


# GSM Lift Watch

## VOICE

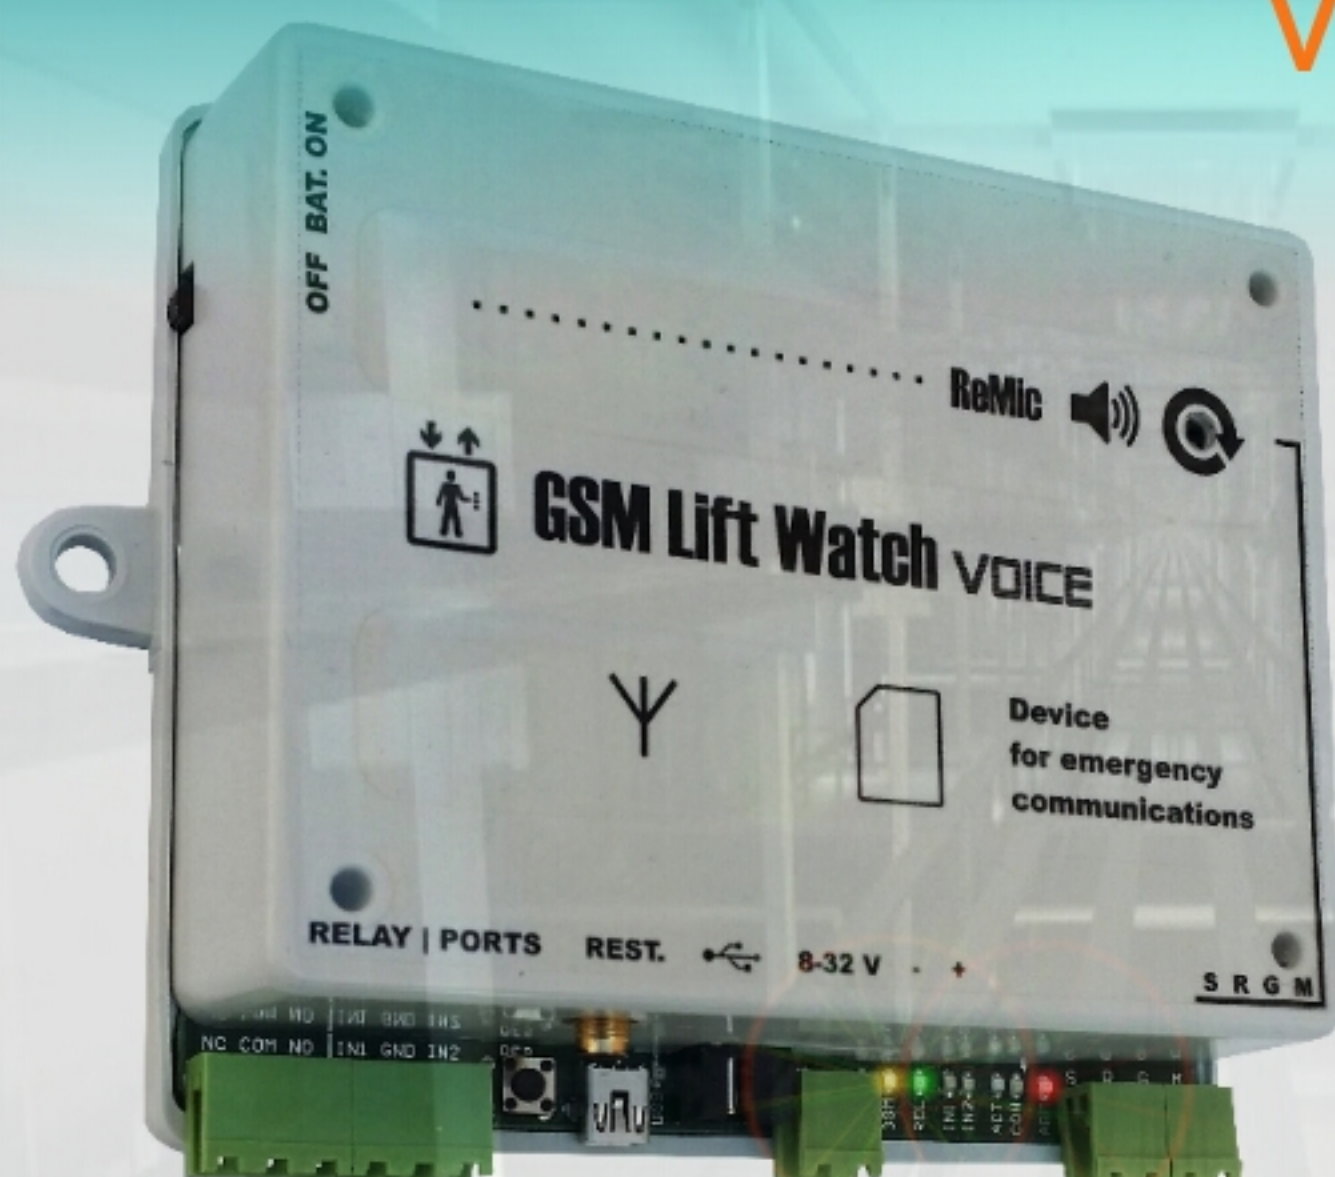

GSM Lift Watch Voice meets all safety standards (EN 81-28, 70) and will certainly gratify your requirements.

You will certainly appreciate easy installation and setup. No worries with a landline, clearly settings with a single SMS message.

Voice messages not only for activation / establishing a connection, but also for next 12 statuses, which may occur during operation.

For the full function it is not necessary to purchase additional components (options) as some competing products. Programmable relay, inputs, testing of supply and backup battery, USB port, voice messaging module etc. - everything is included


- No landline
- Easy to install
- Simple settings
- Voice messages
- Calls up to 7 numbers
- Programmable relay
- Universal input
- Blocking input
- Test acoustic path
- Automatic periodic test
- Backup battery
- USB
- SMS



**ALPHAD**  
Tech

Emergency communicator for each lift



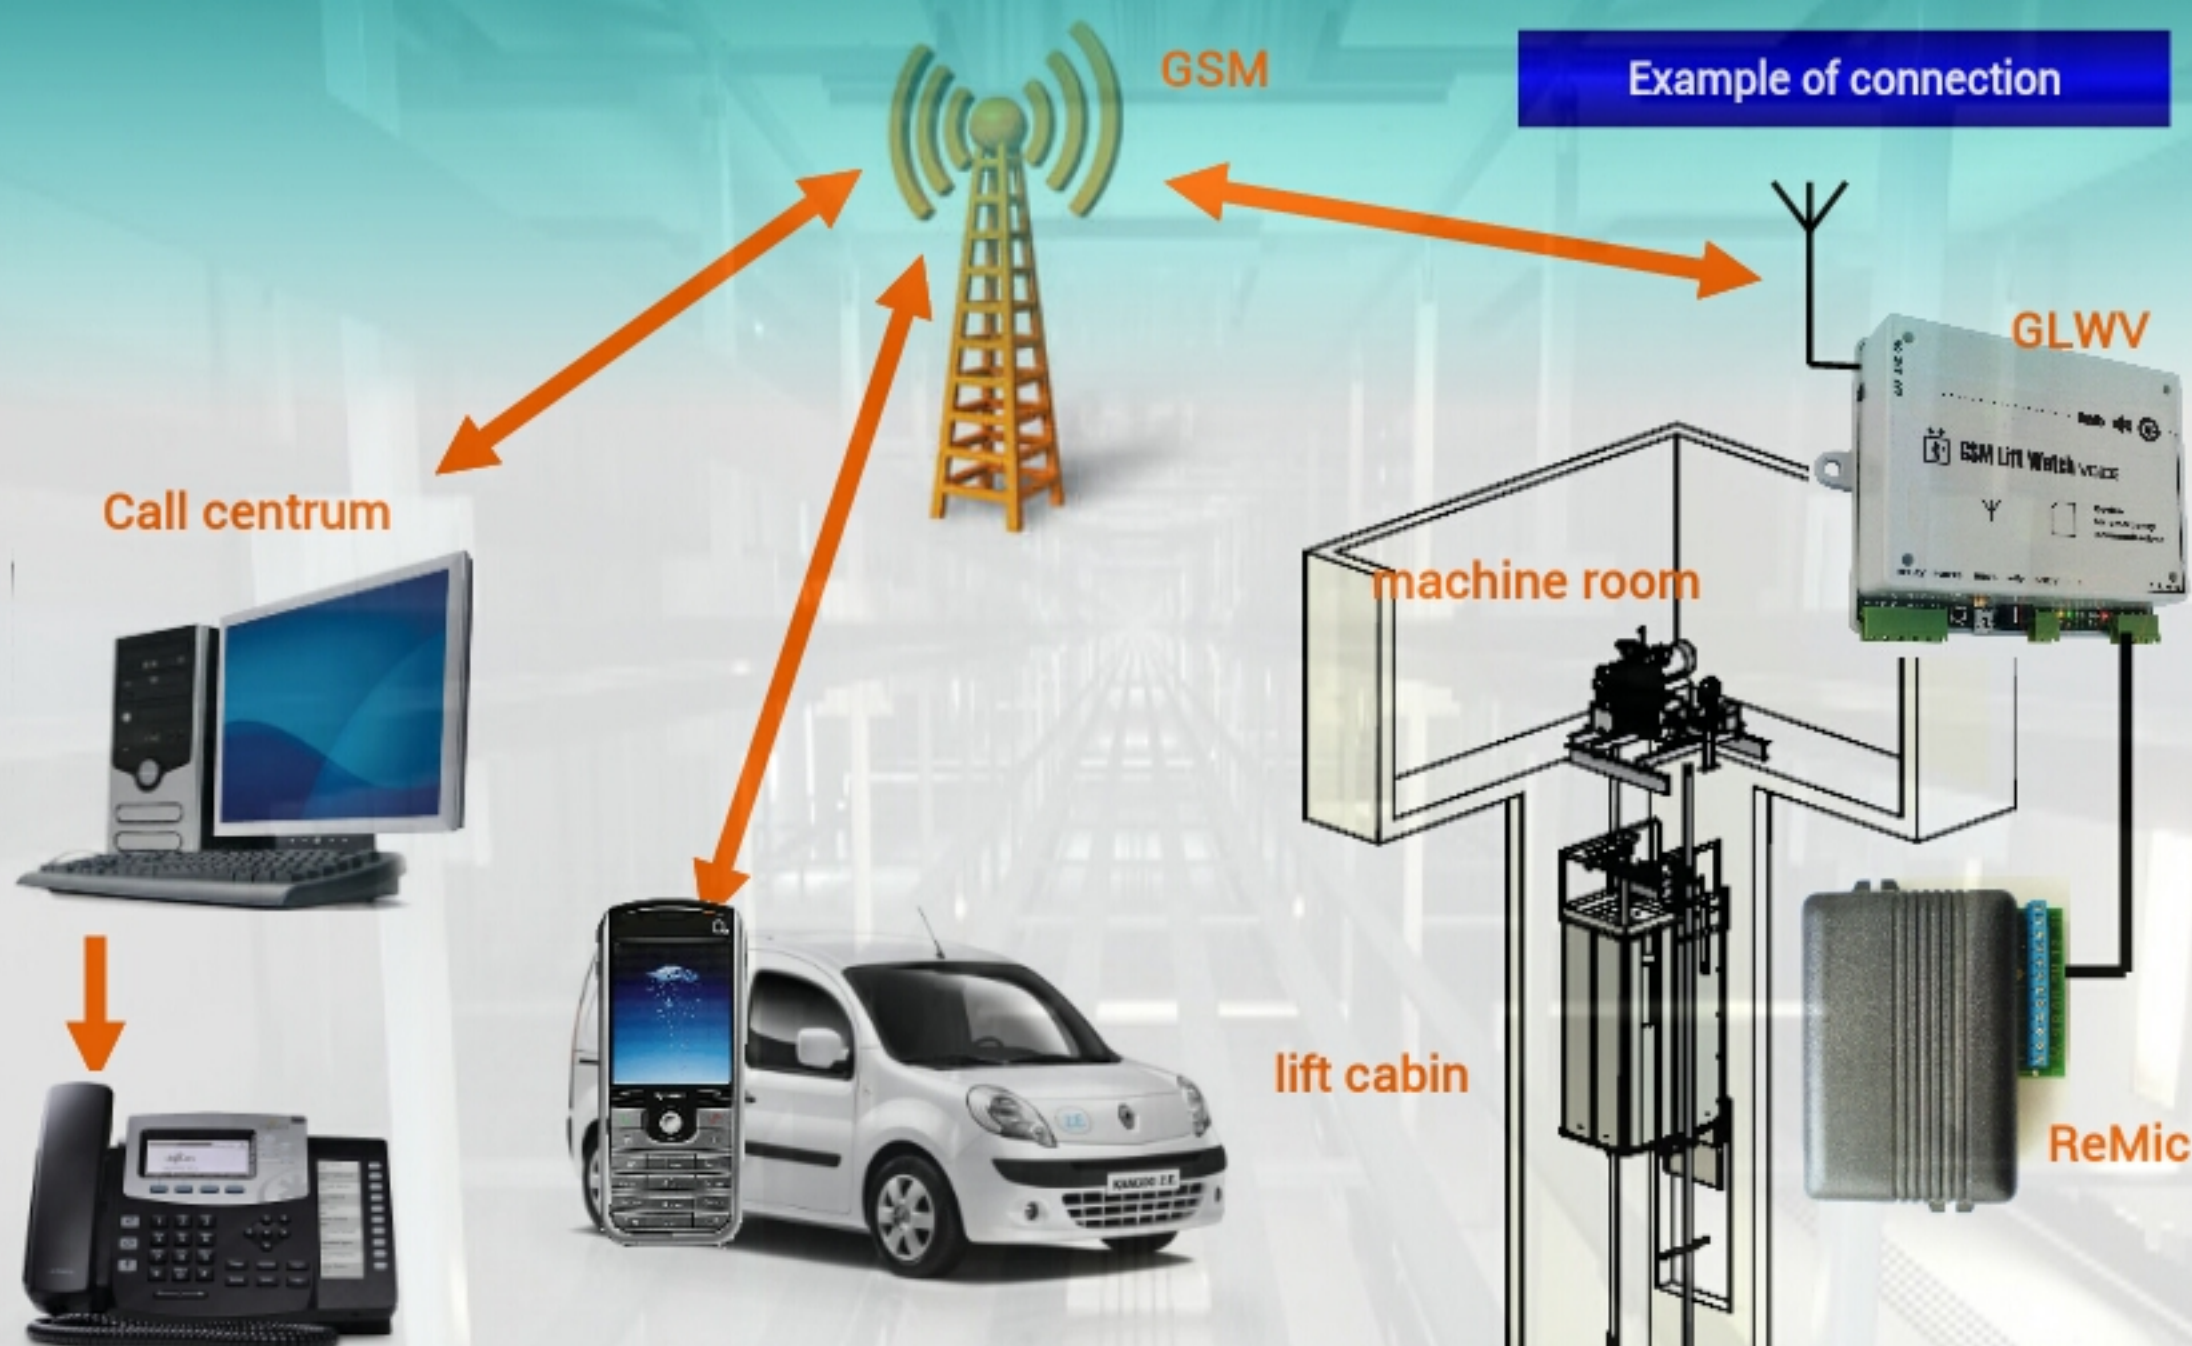

## Choice from technical parameters

Dimensions	
Basic unit	131 x 111 x 38,5 mm
Module ReMic	110 x 78 x 52 mm (without handles)
Power supply	
• Power supply	8 to 30V ss, 50 to 500mA (according to traffic)
• Embedded battery	Li-Ion 2000 mAh - approx 12h operation in standby mode
Inputs/outputs	
• Inputs	2x – 1x blocking calls, 1x universal
• Output	1x changeover contact relay 24V/100 mA
Further parameters	
14 programmable voice messages, each max. 8 sec.	
Programmable contents of status SMSs	
7 programmable phone numbers for sequential dialing emergency call	
7 programmable phone numbers for sequential dialing service call	
Working without PIN / with PIN code - automatically generate a random PIN for SIM card	
Evidence of service interventions on the elevator with the date of the last intervention	

**ALPHA**  
Tech

**Alphatech s.r.o.**

Jeremenkova 88, Praha 4, Czech republic Tel/fax: 420 272 103 334 Mail: info@alphatech.cz